

# REMOTE PILOT ENCLOSURE - RLD SERIES




## FEATURES


Fluids	Non-lubricated filtered air
Operating pressure	between 0.5 and 7.5 bar
Operating temperature with heating element	-20°C; +80°C -40°C +80°C
Cover and base	Die-cast aluminium
Pilot core	Stainless steel
Screws and bolts	Stainless steel
Coil insulation	Class H
Protection	IP66
Standard voltage	230 -110 - 24V 50-60 Hz 19 VA 24VDC 15W
Maximum Valve Distance	10 Metres

(\*) Clearance for opening the cover


## RLD5

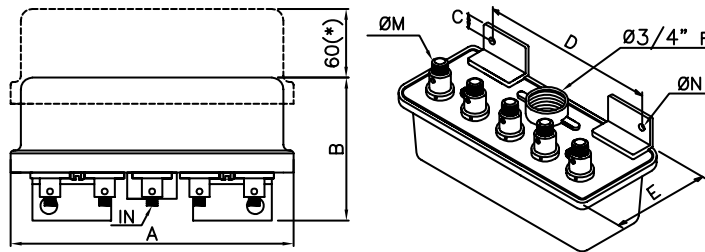

## RLD8

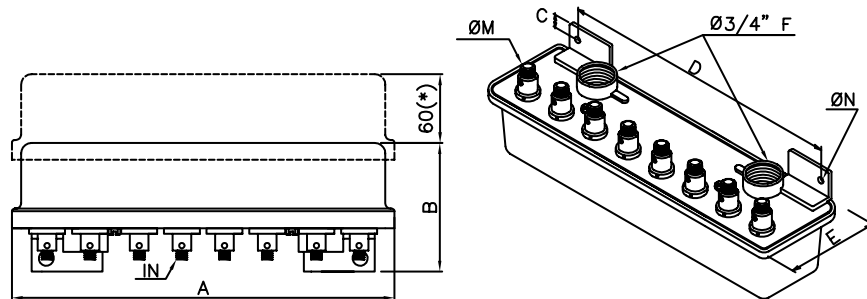

## RLD12

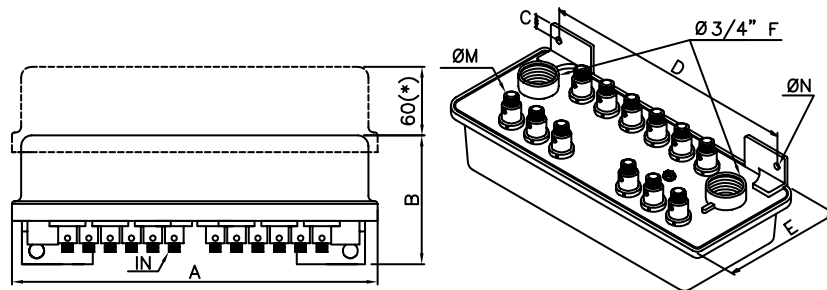

MODEL	A	B	C	D	E	ØM	ØN	Weight (kg)
RLD5	210	98	10	156	100	¼"	11	1.7
RLD8	333	98	10	267	100	¼"	11	3.2
RLD12	306	97	10	237	152	¼"	11	4.4